




APC SERIES



TOTAL COUNTING SOLUTION

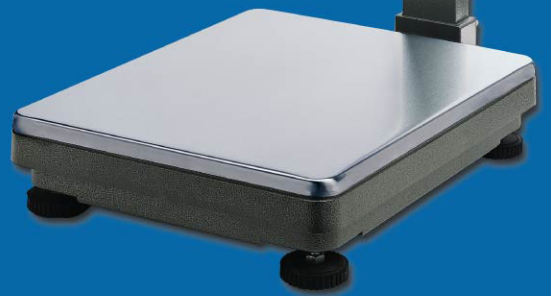

COMMON FEATURES

- OIML/EC Type Approved Digital Counting Scale
- Maximum Division Resolution for Non-OIML Application = 15000
- Heavy Duty Construction. Designed to Meet Industrial Application Requirements
- User Friendly Functions include:
 - ✓ 8 x One-Touch Piece Weight PLUs
 - ✓ Auto Calibration
 - ✓ Auto Piece Weight Enhancement
 - ✓ Auto Power Saving
 - ✓ Full Range Tare
 - ✓ Manual Zero
 - ✓ Memory Accumulation for Weight & Total Count
 - ✓ Negative Sampling & Counting
 - ✓ Over Weight/Total Piece Alarm
 - ✓ Power On Zero Tracking
 - ✓ User Selectable Automatic/Manual Tare
 -
 - ✓ User Configurable Single/Dual Interval Under Non-OIML Mode
- Completed with Full Numeric Keypad, Low Battery Indicator, Charging Status Indicator and Motion Indicator
- 25mm Wide Angle LCD display
- Backlight, Rechargeable Battery, Power Adaptor, RS-232C Interface, Bubble Level and Adjustable Feet Included

OPTIONS AVAILABLE

APC-P : Stainless Steel Pillar and Mounting Accessories

APC-B/F/L : Printer Interface

SPECIFICATIONS

Model No.	Capacity (kg)	Display Resolution		Platform
		OIML MODE (kg)	NON-OIML MODE (kg)	
APC-P3	3	0.001	0.0005	280 x 330mm with Stainless Steel Cover
APC-P6	6	0.002	0.0005	
APC-P15	15	0.005	0.001	
APC-P30	30	0.01	0.002	
APC-P60	60	0.02	0.005	
APC-P150	150	0.05	0.01	
APC-B30	30	0.01	0.002	330 x 450mm with Stainless Steel Cover
APC-B60	60	0.02	0.005	
APC-B150	150	0.05	0.01	
APC-F60	60	0.02	0.005	420 x 520mm with Stainless Steel Cover
APC-F150	150	0.05	0.01	
APC-F300	300	0.1	0.02	
APC-L150	150	0.05	0.01	500 x 600mm with Stainless Steel Cover
APC-L300	300	0.1	0.02	
APC-L550	550	0.2	0.05	
Power Source	By Built-in Rechargeable Battery or Power Adaptor			
Operation Environment	0-40°C (32-104°F) Non-condensed R.H. ≦85%			

* Specifications subject to change without notice

LOCAL DISTRIBUTOR INFORMATION



UNIVERSAL WEIGHT ENTERPRISE CO., LTD.
<http://www.uwe-scale.com.tw>

May 2005 Designed by DAILY
 Printed in Taiwan