




SDC

SERIES



HIGH PRECISION DUAL COUNTING SCALE

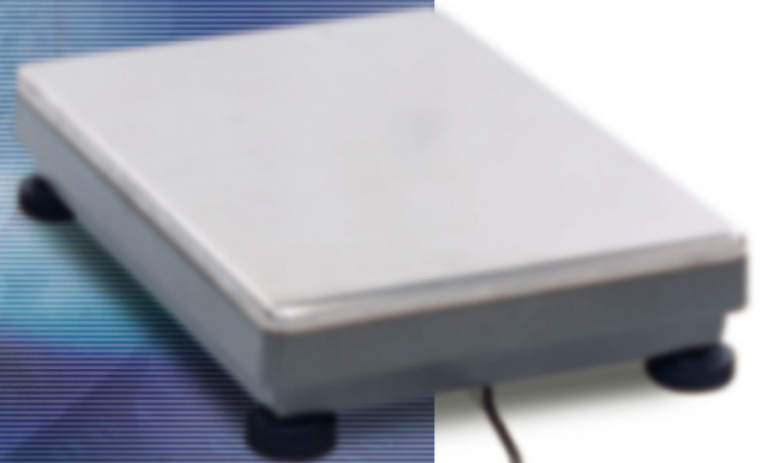

FEATURES

- 24 Bit Σ - Δ High Speed A/D Converter with 1,000,000 Internal Count
- 1/12000 Display Resolution (1/15000 for 300kg & 3000kg Capacities)
- Design to Meet Industrial High Precision & Large Quantity Counting Applications
- Equipped with Power-on Zero Tracking, Digital Motion Filter at Zero & Weighing, Smart Power Saving, Full Tare Range, Auto Piece Weight Enhancement, Auto Calibration and Accumulation Function for Weight and Quantity
- Completed with Full Numeric Keypad, Over Weight & Quantity Alarm, 8 x One-Touch Piece Weight Memory (PLU), Insufficient Unit Piece Weight & Sample Size Warning and Charging Status Indicator
- Bold Type Wide Angle LCD Display Digits
- Low Battery Warning Signal
- Long Battery Operating Time: 100 Hours Plus
- Dual Power Sources: By Built-in Rechargeable Battery or Power Adaptor
- Adjustable Feet, Backlight, Bubble Level and Power Adaptor Included

OPTIONS AVAILABLE

- RS232C or Printer Interface
- Any UWE Platforms

SPECIFICATIONS

Model No.	Capacity	Readability	B Scale Selectable Capacities
SDC-6	6kg	0.5g	60kg, 120kg, 240kg, 300kg, 600kg
SDC-12	12kg	1g	120kg, 240kg, 300kg, 600kg, 1200kg
SDC-24	24kg	2g	240kg, 300kg, 600kg, 1200kg, 3000kg
Tare Range	Full Tare Range (Subtractive)		
Platter Size	230 x 345mm All Stainless Steel		
Power Source	By Built-in Rechargeable Battery or AC/DC Power Adaptor		
Operating Environment	0° ~ 40°C (32° ~ 104°F) Non-condensed R.H. ≤ 85%		

• Specifications subject to change without notice



unit = mm